



RCSTARS Professional LCD Monitors will catch the attention of your customers. High resolution, high performance could meet all kinds of needs of commercial users. Rcstars monitors have a wide range screen sizes from 10" to 98" with 24/7 applications, Eco-Friendly LED Backlit commercial displays consume 30% less power than CCFL-Backlit models, prolong the lifetime of LCD Screen itself. All monitors are with VGA/HDMI inputs, could connect with any type media player box, PC and video devices.

Key Features:


- 24 inch LCD Monitor
- 1920x1080 resolution
- 89/89/89/89 viewing angle
- DP/VGA/HDMI inputs
- 7-24 hours operation
- 2 High Quality Speakers

Application Areas

- Hospitals
- Retail Stores
- Shopping Malls
- Supermarkets
- Museums and Galleries
- Airports
- Train/Bus Stations

24" LCD Monitor

RCS-240DJM

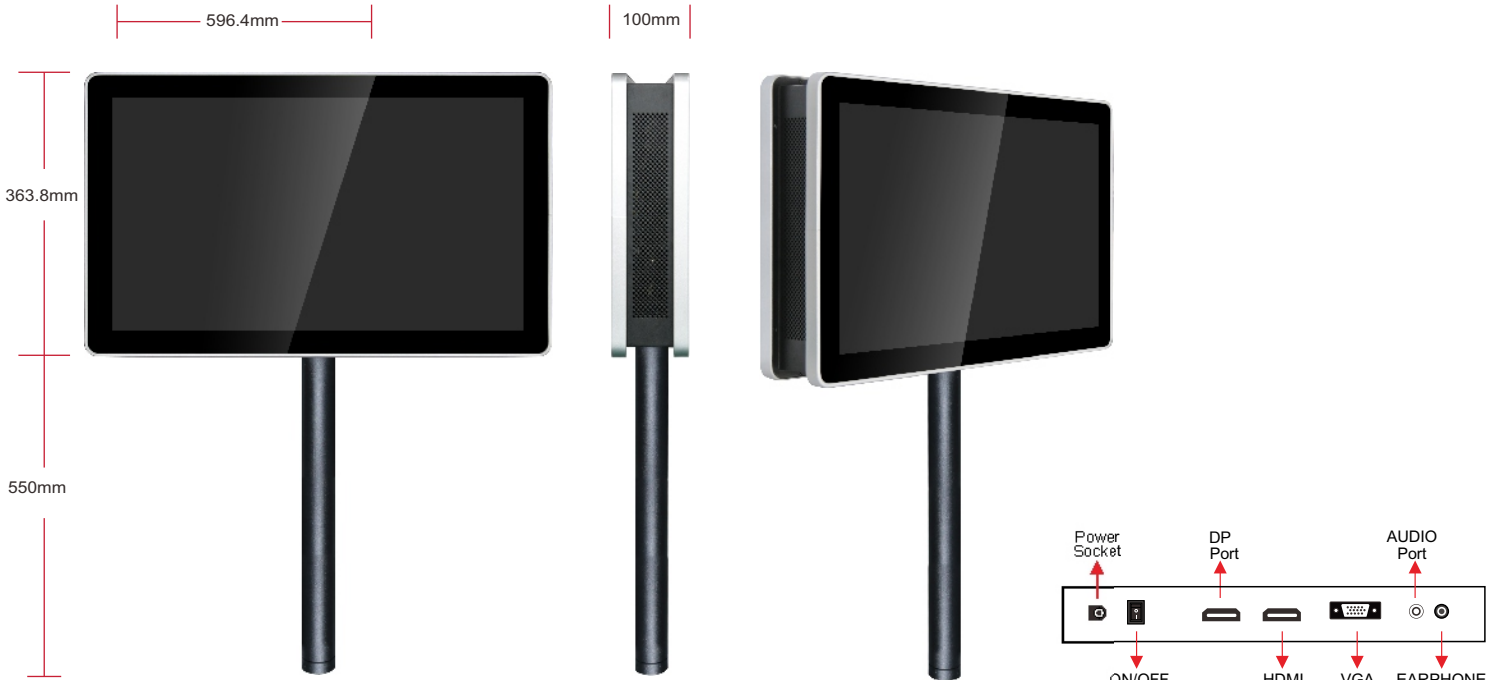

Specifications

DISPLAY	Panel Model	24inch TFT LED
	Max Resolution	1920x1080
	Aspect Ratio	16:9
	Pixel Pitch	0.2745x0.2745
	Viewing Angle	89/89/89/89
	Contrast Ratio	1000:1
	Brightness	300cd/m ²
	Response Time	15ms
	Display Area (mm)	527.04x296.46mm
	Panel Size(mm)	543x317.4x11.6mm
	Screen Weight	2.27Kg
	Lamp Type	WLED
INTERFACE	1*DP input	
	1*HDMI input	
	1*VGA input	
	1*Type-C input (optional)	
	1*Audio input	
	1*Earphine output	
	1*AC input	
		Up to 1920x1080@60Hz
	VGA	480i, 480p, 720i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 720i, 720p, 1080i, 1080p
Switch	Power on/off	
DESIGN	Color	Matte Black

ON-SCREEN DISPLAY LANGUAGES	English, French, German, Italian, Polish, Russian, Simplified Chinese, Spanish, Turkish, Arabic, Japanese, Traditional Chinese etc.
DISPLAY MODE	Portrait & Landscape
TOUCH	Infrared touch / Capacitive Touch options
POWER	Mains Power Consumption DC 12V, 50-60 Hz 31W
SOUND	Built-in Speakers 2 x 5W
DIMENSION & WEIGHT	Monitor Size 596.4x100x363.8mm Monitor Weight 13.4KG Carton Size 670x520x190mm Carton Weight 19.5KG QTY/CTN 1PCS
OTHER	Regulatory Approvals CE, FCC, ROHS, HDMI certificates Warranty 2 years warranty
ACCESSORIES	Remote Control Optional Power Supply x1 (DC adaptor/ DC cable) User's Manual x1